


CONFIGURATION TABLE
MODEL NUMBER/ORDERING CODE

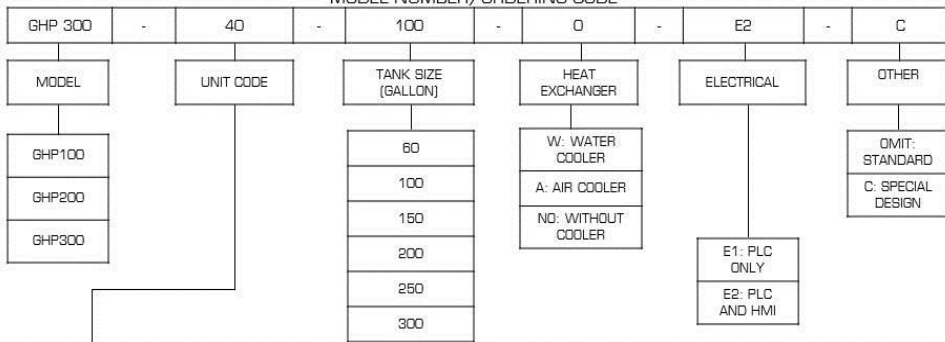

CODE	RATED GPM	MAX. GPM	RATED PSI	NORMAL HP	TANK SIZE
10	5	15	3000	10	60
20	10	30	3000	20	100 or 150
30	15	30	3000	30	100 or 150
40	20	30	3000	40	100 or 150
50	25	40	3000	50	150
60	30	50	3000	60	150
70	35	70	3000	70	200
80	40	55	3000	80	100 or 150
100	50	70	3000	100	200
120	60	100	3000	120	250
170	85	100	3000	170	250
210	105	130	3000	210	300
260	130	160	3000	260	300

* NOMANCLATURE EXAMPLE: GHP300-40-100-NO-E3-C

- MAXIMUM PRESSURE COULD BE UP TO 4500 PSI FOR MOST MODELS
- OTHER FLOW RATES AND PRESSURES ON REQUEST


GHP VARIABLE SPEED DRIVE

OUR GHP DRIVE ALLOWS YOU TO UPGRADE YOUR EXISTING HPU WITH VARIABLE SPEED TECHNOLOGY



GREEN HYDRAULIC POWER

GHP 300

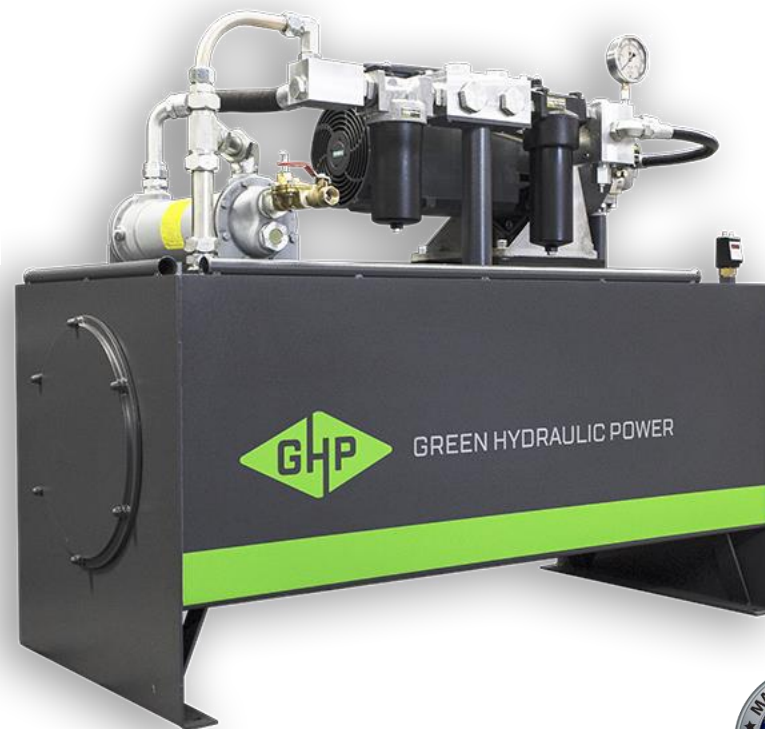

INTRODUCING THE MOST INNOVATIVE SYSTEM EVER MADE

BRINGING VIRTUALLY ANY PIECE OF HYDRAULICALLY DRIVEN EQUIPMENT INTO THE 21ST CENTURY



TYPICAL APPLICATIONS

- HIGH ACCURACY PRESSES
- PRESS BREAKS
- INJECTION MOLDING MACHINES
- ADVANCED HYDRAULIC EQUIPMENT

KEY FEATURES:

- SERVO MOTOR AND FIXED DISPLACEMENT PUMP
- HIGHEST DYNAMIC PERFORMANCE
- HIGH POWER DENSITY, ROBUST CONTROLLABILITY
- MOST FLEXIBLE CONFIGURATION;
 - HORSE POWER CONTROL
 - FLOW PRESETS
 - PRESSURE PRESETS
- MOST ACCURATE FLOW AND PRESSURE CONTROL
- FORCE AND SPEED CONTROL
- POSITION CONTROL
- MAXIMUM ENERGY SAVINGS
- 9" TOUCHSCREEN STANDARD
 - IMPROVED DIAGNOSTICS FEATURES
 - OIL LEVEL
 - OIL TEMPERATURE
 - POWER CONSUMPTION
 - SYSTEM PRESSURE
 - FLOW RATE
 - PUMP RPM
 - TORQUE
 - STRIP CHART DATA DISPLAY

OPTIONAL FUNCTIONS AVAILABLE

- BLUETOOTH CONNECTION AVAILABLE
- INDUSTRY 4.0 READY

